

bruce
SYSTEMS


**ONE DIVER
COMMS UNIT**



Our Communicator Unit has been specially developed with the aim of preventing dust and water from entering its interior. Each component was chosen based on the minimum requirement of obtaining an IP67 system. The design of the front panel has been conceived to make water tight between the panel and the protective/transport case that contains all the electronics. The front panel is provided with a gasket which makes a seal between the panel itself and the protective case.

We have developed a modular system capable of being reconfigured in order to have batteries of different capacities based on operational needs.

The 114-1XXX Series is equipped with 1 x 12V - 3.4Ah sealed lead acid batteries. Extended autonomy version can be supplied on request.

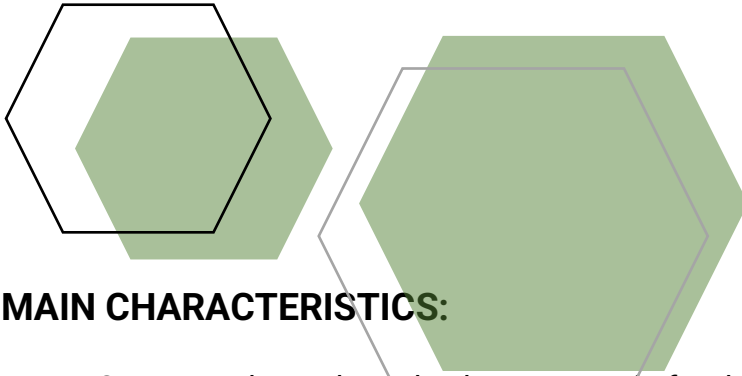

MAIN CHARACTERISTICS:

- Separate channels and volume controls for the Diver
- Separate channels and volume controls for tender
- Internal charger and battery
- Audio OUT for recording (with separate volume control)
- Audio IN (with separate volume control)
- AC Power Operating 90-240 VAC 50/60 Hz
- External Power supply 12VDC
- Operational mode: 4-wire mode (full duplex)
2-wire mode (push-to-talk)

DIMENSION:

Ext. Dimensions: L 31 cm l 24 cm h 20 cm.

Weight (1DLX): 5 Kg
(1STD): 4,9 Kg

INCLUDED WITH COMMS:

- Hand-Held Push-to-Talk microphone
- Europe Power Cable (CEE 7/7)
- Sealed Lead Acid Gel-Cell Rechargeable Battery

Order code:

114-1DLX

114-1STD